

SP-HK8030IR-IP

2M FULL HD PTZ 網路攝影機

**FINE**

特色 Features

- 1/2.9" 200萬像素的 SONY Exmor CMOS 高解析攝影鏡頭
- 最高 1080P 解析度，支援 30 倍光學變焦和 12 倍數位變焦
- 手動水平控制速度：0.01-360°/s 預置位精確度：±0.05°
- 360°連續旋轉，0°~90°傾斜旋轉
- 紅外線距離可達 150M
- 鑄鋁外殼，金屬攝影機，防水等級 IP66
- 支援 OSD 數位高解析影像菜單，可以遠端設定參數
- 支援 Micro SD 卡插槽本地存儲(支援達 64GB)
- 附贈 Maxiwatch 精簡版 64CH 錄影軟體
- 支援 ONVIF 協議
- 支援 Maxiwatch 專業 IP 軟體

CAMERA

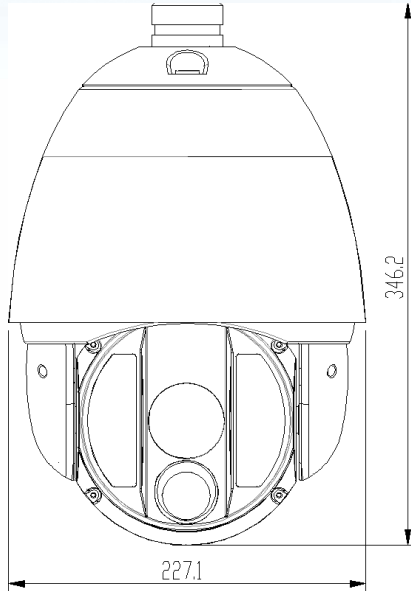
規格 Specification



型號	SP-HK8030IR-IP Speed Dome
圖像感應器	2MP 1/2.9 " SONY Exmor CMOS
有效圖素	2.0 Mega Pixel
影像解析度	Main code stream:1080P(1920x1080)
張數	1920x1080@30fps, 1280x720@30fps, 640x480@30fps, 320x240@30fps, 176x144@30fps
WDR	Off, Low, Middle, High
電子快門	1/1-1/5,000s
白平衡	Auto/Indoor/Outdoor/Fine shade 7500K/Cloudy weather 6000K/Fluorescent light 4200K/ Halogen light 3200K/Electric light bulb 2900K
DNR 模式	Off, Low, Middle, High
3D 降噪	支援
最低照度	Color Mode : 0.05lux(F1.6,50IRE,AGC ON) B/W Mode : 0.005lux(F1.6,50IRE,AGC ON)
日夜	Auto(ICR)
影像參數	Set image brightness/contrast/saturation by IE
攝影機參數	Manual adjustment by OSD menu
焦距	30X(f=4.5-135mm) F1.6~4.4
視野	2°~59°(H), 1°~40°(V)
網路介面	10M/100M,RJ45 interface
Micro SD Card	Micro SD(TF) Card(Max 64GB),support manual recording/alarm recording
音訊	1 channel audio input & 1 channel audio output
警報	4 channel alarm input & 4 channel alarm output
作業系統	Embedded Linux
影像壓縮	H.264, M-JPEG
音頻壓縮	G.711/G.726/ADPCM
編碼類型	Baseline Profile/Main Profile/High Profile optional
Bit Rate	32K ~ 16Mbps
音頻壓縮碼率	8K~48K Bps
手動速度	水平 Pan: 0.42°~25.8°/s / 垂直 Tilt: 0.31°~18.69°/s
最大預設速度	360° per second
預設點精度	<±0.15°
Pan/Tilt 範圍	Pan: 360° / Tilt: 180° 自動旋轉
垂直旋轉範圍	-10°~90° auto flip
預設點	256 points
自動搜尋	8 auto scan tracks
自動巡航	8 auto cruising tracks
Patrol	8 groups with 24 point
OSD 選單	Off / On
斷電記憶功能	支援
保護功能	Link preset/scan/cruise/pattern

Time task	Preset/scan/cruise/pattern/auto-tracking
Motor	Hybrid high-accuracy stepless motor
加熱器	Auto (Outdoor)
自動除霧	支援
IE 流覽	Support
行動裝置	Support iOS /Android/Windows Mobile
網路通訊協定	IPv6, IPv4, HTTP, HTTPS, SNMP, QoS/DSCP, Access list, IEEE 802.1X, RTSP, TCP/ IP, UDP, SMTP, FTP, PPPoE, DHCP, DDNS, NTP, UPnP, 3GPP, SAMBA, Bonjour
IP 位置	Support static state IP address/DDNS
OSD 字元	Support character, time and PTZ angle
系統時間	Build-in clock, support external synchronization
遠端管理	Remote network upgrade
智能警報	Motion, Camera Occlusion, Strong light, Lost focus
保護層級	IP66
工作溫度	-20°C ~ 60°C Temperature Range for Weather Conditions -40°C ~ 50°C Temperature Range for Weather Conditions (with Heater)
工作濕度	20% ~ 80%
電源	DC36V~56V / PoE
功率	50W
重量	NW: 5.3 kilos

▲規格如有變動，將不另行通知。

FINEST SECURITY SYSTEMS CO., LTD.



Accessories	
Pendant Mount Bracket+ Power Box	 VB-820P
Wall Mount Bracket + Power Box	 VB-820W